



Connecting Your Voice To The World!

LineaVOX UcaaS and PBX User Guide

FastFind Links

[Using Your Desk Phone](#)

[Using the User Web Portal](#)

[Voicemail](#)

[Answering Rules and Time Frames](#)

[Contacts](#)

[Phones](#)

[Music On Hold](#)

[Call History](#)

[Profile](#)



CONTENTS

Contents	ii
Introduction	iv
1. Using Your Desk Phone	5
Making Calls.....	6
Making International Calls	6
Extension Dialing.....	6
Intercom	6
Receiving Calls.....	7
Voicemail.....	7
Accessing Voicemail	7
Setting Up Your Mailbox.....	7
Alternate Greetings	8
Voicemail Tree	8
Handling Calls	10
Attended Transfer.....	10
Blind Transfer	10
Transfers to External Numbers	11
Voicemail Transfer	11
Park and Hold.....	11
Directed Call Pickup	11
3-Way Conference	11
2. Using the User Web Portal	13
Accessing the Portal.....	15
Desktop Call Control	15
Incoming Calls	15
Active Calls.....	16
Home 18	
Voicemail.....	19
Messages	19
Voicemail Settings.....	20
Recording a Greeting	21
Uploading a Greeting.....	24
Text to speech	24
Greeting for Dial by Name Directory.....	24

Contents

Answering Rules and Time Frames	25
Time Frames	25
If you select Days of the week and times	26
If you select Specific dates or ranges.....	30
Answering Rules	32
Call Forward Drop-down Options	34
Ring Timeout.....	35
Allowing or Blocking Callers	35
Contacts	38
Filter and Search	38
Add and Import Contacts.....	38
Adding a Contact	39
Importing Contacts	40
Selecting Favorites	40
Editing Contacts	41
Phones	42
Using SNAPmobile.....	43
Music On Hold.....	45
Music On Hold.....	45
User MoH Layout	45
Call History	47
Filtering the Call History	48
Exporting the Call History Log.....	50
Profile	51
Index.....	53

INTRODUCTION

Welcome to the LineaVOX UCaaS and PBX User Guide! At LineaVOX, we're committed to simplifying communication and empowering you with tools designed to enhance your productivity and streamline your daily operations.

This guide provides step-by-step instructions to help you make the most of your LineaVOX UCaaS system. From managing voicemail and call forwarding to using advanced features like time frames and answering rules, every tool is designed with your convenience in mind. With LineaVOX, you can save time, improve call management, and stay connected whether you're in the office or on the go.

By combining powerful functionality with an easy-to-use interface, LineaVOX ensures that you can focus less on managing technology and more on growing your business. Dive in, and discover how LineaVOX can simplify communication and boost your productivity!

1. USING YOUR DESK PHONE

Topics:

- ^ *Making Calls (page 6)*
- ^ *Receiving Calls (page 7)*
- ^ *Voicemail (page 7)*
- ^ *Handling Calls (page 10)*

While there are many different models of desk phones, they largely all work the same way. In this chapter, you will learn how to use common functions of your phone.

Making Calls

Making a call with your phone does not require a leading 9. You can dial on-hook or off-hook.

➤ To dial on-hook

1. Dial the phone number.
2. Pick up the handset, headset, or speaker.

➤ To dial off-hook

1. Pick up the handset, headset, or speaker.
2. Dial the phone number.

Calls to the US and Canada are all dialed using 10 or 11 digits. Local calls can be dialed using 7 digits.

Making International Calls

➤ To dial an international call

1. Dial the international call code 011.
2. Dial the country code.
3. Dial the local number.

International calling is commonly disallowed to prevent toll fraud.

Extension Dialing

Extensions on your system can be dialed using their 3-to-4 digit extension or by pressing the button on your phone corresponding to the desired extension.

Intercom

VoIP phones provide an intercom feature that allows you to instantly connect to other phones within your office. Intercom functionality is ideal for announcing visitors or asking a quick question.

When one phone intercoms another extension, it does not ring the other phone. Instead, the other phone will beep, and then its microphone and speaker turn on.

➤ To intercom

1. Dial 08ext. For example, to intercom extension 100, dial **08100**.

Receiving Calls

When a call comes in, you can answer it via a headset, speakerphone, or handset.

- **To answer a call using a handset**
 - Lift the handset off-hook.
- **To answer a call using a speakerphone**
 - Press the **Speaker** button.
- **To answer a call using a headset**
 - Usage depends on how the headset is connected. Often, you'll press the button on the headset or press the headset button on the phone.

Voicemail

Accessing Voicemail

- **To access voicemail**
 1. Press the **Messages** button on your phone to access your voicemail box, or dial 5001 if you can not identify the voicemail button.
 2. If you subscribe to multiple mailboxes, a list of mailboxes may appear. Select the mail box you want to access.
 3. When prompted, enter your voicemail pin, and then press **#**.
- **To access another person's mailbox**
 1. Dial **5000**.
 2. When prompted, enter the other person's extension number.
 3. Enter the voicemail PIN of the other person's mailbox, followed by **#**.

Setting Up Your Mailbox

The first time you log in to your mailbox you are walked through recording your name for the directory and recording your personal greeting.

The name recording is for the dial-by-name directory, so when someone enters the first three letters of your last name, it will play back your name recording.

The greeting plays when your mailbox is reached. It is very important to make a custom message, as many callers will not leave messages at mailboxes that have generic greetings.

Alternate Greetings


Your mailbox supports multiple greetings for different scenarios like business trips and holidays.

> To record an alternate greeting

1. From your mailbox, press **6** for greetings, and then press **1** to record an alternate greeting.
2. When prompted for the greeting number press **2** for your next alternate greeting (1 is your default greeting).
3. After your recording is completed, select the active greeting by selecting option **3** in the greetings menu.

Voicemail Tree

On the next page you'll find a voicemail tree showing what to dial for each option in your mailbox.

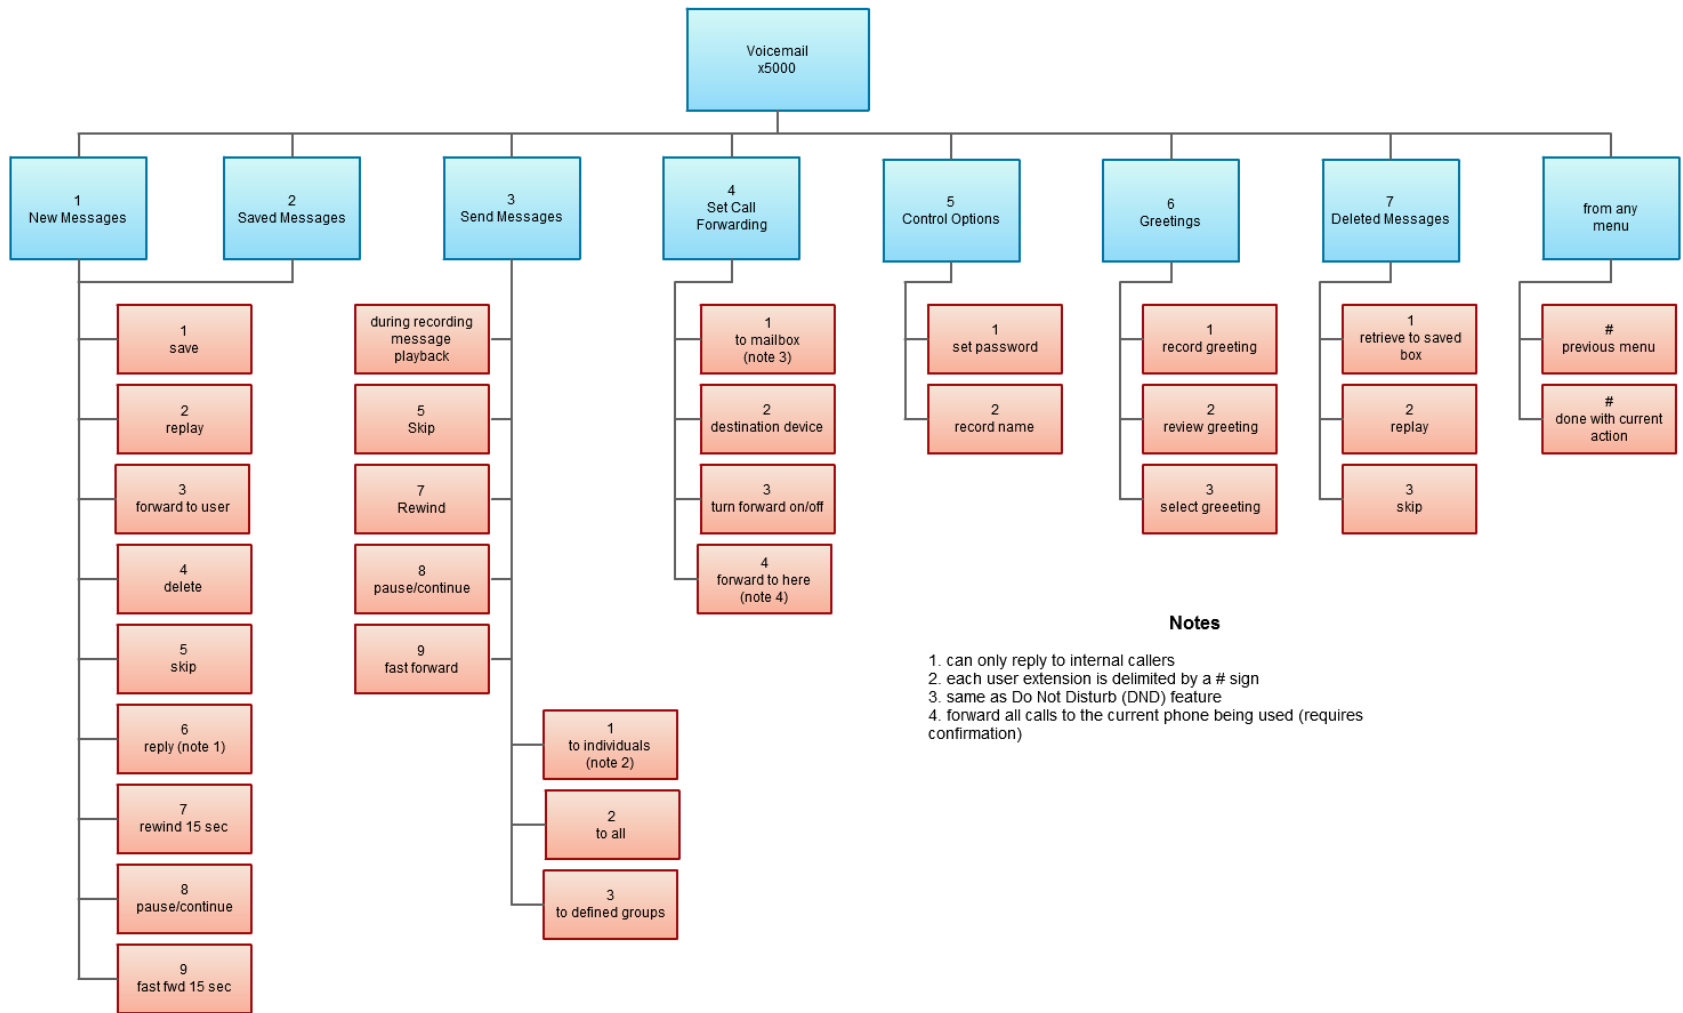

Handling Calls

Your LineaVOX UCaaS features various ways to move calls around, including attended transfer, unattended (blind) transfer, voicemail transfer, park, and more. In this section, references to BLFs are the 1-touch buttons to extensions common at front-desk phones.

Attended Transfer

Attended transfer allows you to speak to the transfer recipient prior to completing the transfer while the caller is on hold.

➤ To perform an attended transfer using Polycom and Yealink phones

1. Press the **Transfer** key/softkey on your phone.
2. Dial the recipient's extension or press their BLF.
3. Speak to the recipient, and then either press **Transfer** again to complete or cancel if the recipient cannot take the call.

Blind Transfer

Blind transfer goes straight to the recipient.

➤ To blind transfer using Polycom phones with older firmware

1. Press **Transfer**.
2. Press the **Blind** softkey. (if there is no Blind softkey see directions for new firmware)
3. Enter the extension of the recipient or the recipient's BLF.

➤ To blind transfer using Polycom phones with newer firmware

1. Press and hold the **Transfer button**.
2. Select Blind from the on screen menu
3. Enter the extension of the recipient or the recipient's BLF.

➤ To blind transfer using Yealink phones

1. Press **Transfer**.
2. Dial the extension of the recipient
3. Press Transfer.

Transfers to External Numbers

A transfer can also go to an external number such as a cell phone. Follow the transfer directions above but instead of dialing an extension, dial a 10 digit phone number.

Voicemail Transfer

Voicemail transfer goes straight to the recipient's voicemail box without ringing the recipient's phone.

➤ To perform a voicemail transfer

- Perform a blind transfer with a 03 prefix before the extension. For extension 111's voicemail, for example, blind transfer to 03111.

Park and Hold

On your phone system, hold is a local function. This means a call held on your phone cannot be picked up at another station. Park is a system-wide function. This means a call parked at one phone may be picked up by any phone.

➤ To park a call

1. Dial *** in an active call from any phone. The system says, "The call is parked at 7xx."
2. Hang up.

To retrieve the parked call, dial **7xx** where **xx** is the number stated by the system.

Directed Call Pickup

Directed call pickup (DCP) allows you to answer a call ringing at another station.

➤ To perform a directed call pickup

- Dial **07ext**. If 111 is ringing, for example, dial **07111** to pick up that call.

Phones with BLFs to the ringing station can also press the corresponding BLF.

3-Way Conference

➤ To make a 3-way conference

1. Call or be called by the first participant in the conference.
2. Press the **Conference** key/softkey, and then dial the second participant.

3. After the second participant picks up, press **Conference** again to connect everyone.

2. USING THE USER WEB PORTAL

Topics:

- ^ [Accessing the Portal](#) (Page **Error! Bookmark not defined.**)
- ^ [Voicemail](#) (Page **Error! Bookmark not defined.**)
- ^ [Answering Rules and Time Frames](#) (Page **Error! Bookmark not defined.**)
- ^ [Contacts](#) (Page **Error! Bookmark not defined.**)
- ^ [Phones](#) (Page **Error! Bookmark not defined.**)
- ^ [Music On Hold](#) (Page **Error! Bookmark not defined.**)
- ^ [Call History](#) (Page **Error! Bookmark not defined.**)
- ^ [Profile](#) (Page **Error! Bookmark not defined.**)

Each extension of your LineaVOX UCaaS system has access to a powerful web portal for managing voicemail, call routing, and more.

Accessing the Portal

➤ **To access the web portal**

1. Start a web browser.
2. Go to <https://lineavox.simplelogin.net>.
3. At the login page (see **Error! Reference source not found.**):
 - Enter your **Login Name** (*ext@cust-id*) and **Password**. If you do not know your Login Name or Password use the applicable **Forgot Link**.
 - If you never received these details use the **Are you a New User** link

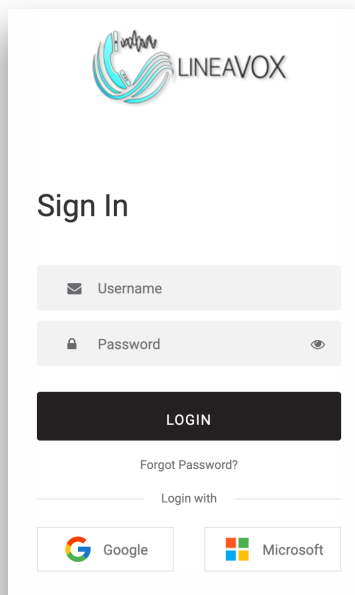


Figure 2-1

Desktop Call Control

Desktop call controls appear when making or receiving a call. These controls allow you to see who is calling and manage a current call.

Incoming Calls

Incoming calls appear in a window in the portal similar to the one in Figure 2-1. This window shows the caller ID name and number, along with **Reject** and **Answer** buttons.

- Selecting **Reject** sends the call to voicemail if available. The **Answer** button may not be available, depending upon your handset model.

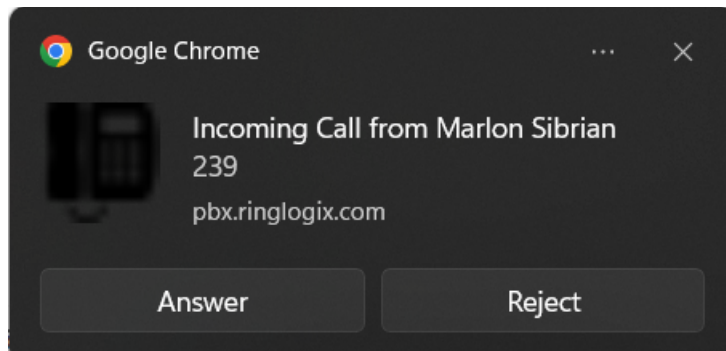


Figure 2-1. Example of an Incoming Call

Active Calls

Figure 2-2 shows an active call window that displays the caller ID and call time. The three controls at the bottom of the window let you hold, hang up, or transfer the call. If you select transfer, a field appears for entering the extension of the recipient. If you prefix the recipient's extension number with 03, the call goes straight to voicemail.

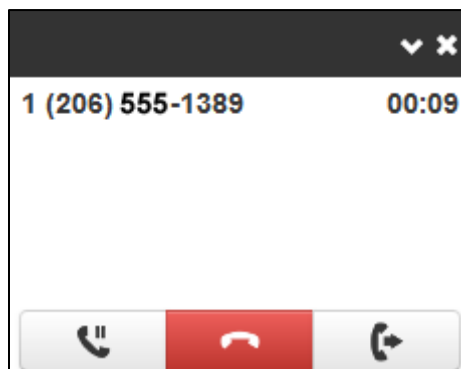


Figure 2-2. Example of Active Call Window

Home

The Home page of your portal provides an at-a-glance view of everything going on with your extension. Table 2-1 describes the areas on the Home page.

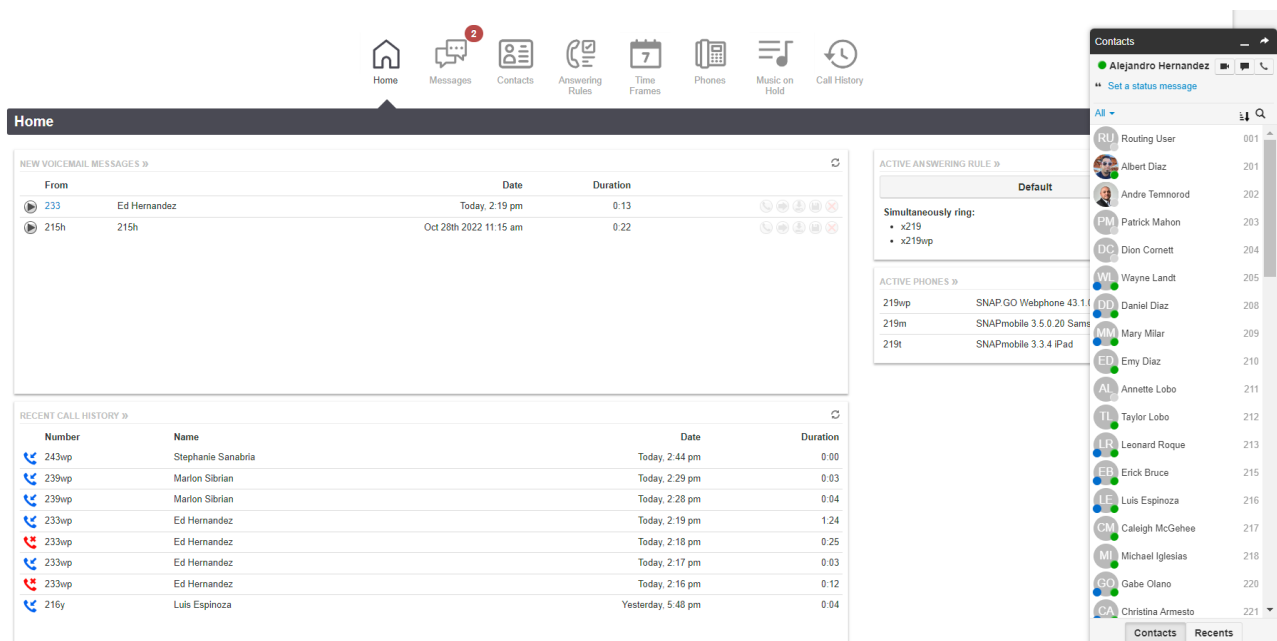


Figure 2-3. Example of Home Page

Table 2-1. Fields in the Home Page


Field	Description
New Messages	Shows new messages. You can play messages, click to call back, download, save, and delete. To see all the controls, hover over the message.
Recent Call History	Color-coded icons show your recent calls. <ul style="list-style-type: none"> Green icon = outbound call. Red icon = missed inbound calls. Blue icon = inbound received calls. To call back a number, click the phone number.
Status Message	Allows you to enter a status message that appears to other users of the portal.
Active Answering Rule	Your extension can have multiple answering rules. For example, you might ring your phone in one mode or forward to your cell in another mode. In this field, you can which answering rule is the active rule.
Active Phones	Your extension may have multiple phones (for example, one in the office and one at home). This field shows which handsets are currently online.

Voicemail

You configure voicemail using the Messages page. This page has two tabs for handling voicemail:

- **Messages** — see “Messages” below.
- **Settings** — see “Voicemail Settings” on the next page.

To display the Messages page, click the **Messages** icon at the top of the page:



Messages

The **Messages** tab allows you to manage your new, saved, and deleted voicemail, as well as greetings and other settings.


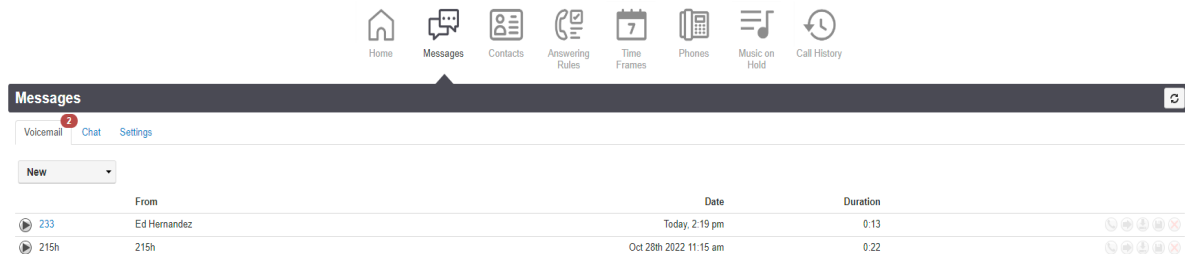


Figure 2-4. Messages Page

Like the Home page, you can play messages, click a number to call it back, and download, save, forward, and delete messages. To see all the controls available, hover the mouse pointer over a message.

The **New** drop-down list allows you to review New, Saved, and Trash (recently deleted) messages.

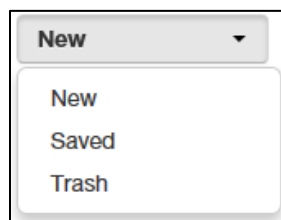

Voicemail Settings

Clicking the **Settings** tab displays options for controlling your voicemail order, timestamps, greetings, and voicemail to email.

Voicemail ² Chat Settings

Enable Voicemail

Inbox

Options Sort voicemail inbox by latest first
 Announce voicemail received time
 Announce incoming call ID

Operator Forward

Copy to extension(s)

Voicemail Transcription

Email Address(es)

Options Send email when mailbox is full
 Send email after missed call

Greetings

Voicemail Greeting

Recorded Name

Notifications


Email Notifications Receive an email for new voicemail

Email Type

After Email Notification


Figure 2-5. Settings Tab


Table 2-2. Fields in the Settings Tab

Field	Description
Enable Voicemail check box	Enables (check) or disables (uncheck) voicemail.
Inbox	<p>These options affect audio voicemail (calling in) but not the portal.</p> <ul style="list-style-type: none"> Sort Voicemail inbox by latest first = plays your newest messages first. Announce voicemail received time = plays the timestamp of the message. Announce incoming call ID = plays the caller ID number if available. Operator Forward = option to press 0 in a mailbox greeting and be directed elsewhere.
Greetings	<p>Allows you to select an active voicemail greeting, listen to it, and record a new greeting.</p> <ul style="list-style-type: none"> To select the active voicemail greeting, click it from the pull-down menu and click Save. To listen to a selected greeting on your PC, click the play button:  To record a greeting, see "Recording a Greeting" on page 21.
Notifications	<p>Provides the following selections for adjusting your voicemail to email settings if the option is checked.</p> <ul style="list-style-type: none"> Send w/ hyperlink = a link to the voicemail is emailed to you. Send w/ brief hyperlink = a link to the voicemail in plaintext is emailed to you. Send w/ attachment (<i>storage option</i>) = an email is sent to you with the audio file of the message attached. The <i>storage option</i> allows you to leave messages in your inbox as new, move to saved, or move to trash. Send w/ brief attachment (<i>storage option</i>) = an email is sent to you in plaintext with the audio file of the message attached. The <i>storage option</i> allows you to leave messages in your inbox as new, move to saved, or move to trash.

Recording a Greeting

➤ To record a greeting

1. From the **Settings** tab of the Messages page, click the speaker icon  as shown below. A *Manage Greetings* page similar to the one in Figure 2-6 appears.

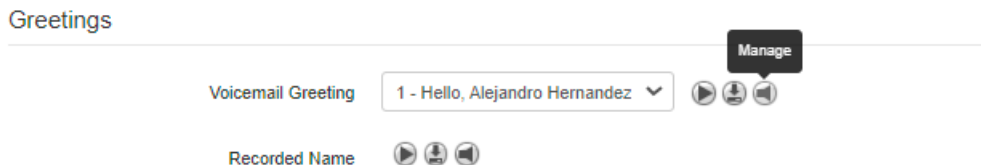

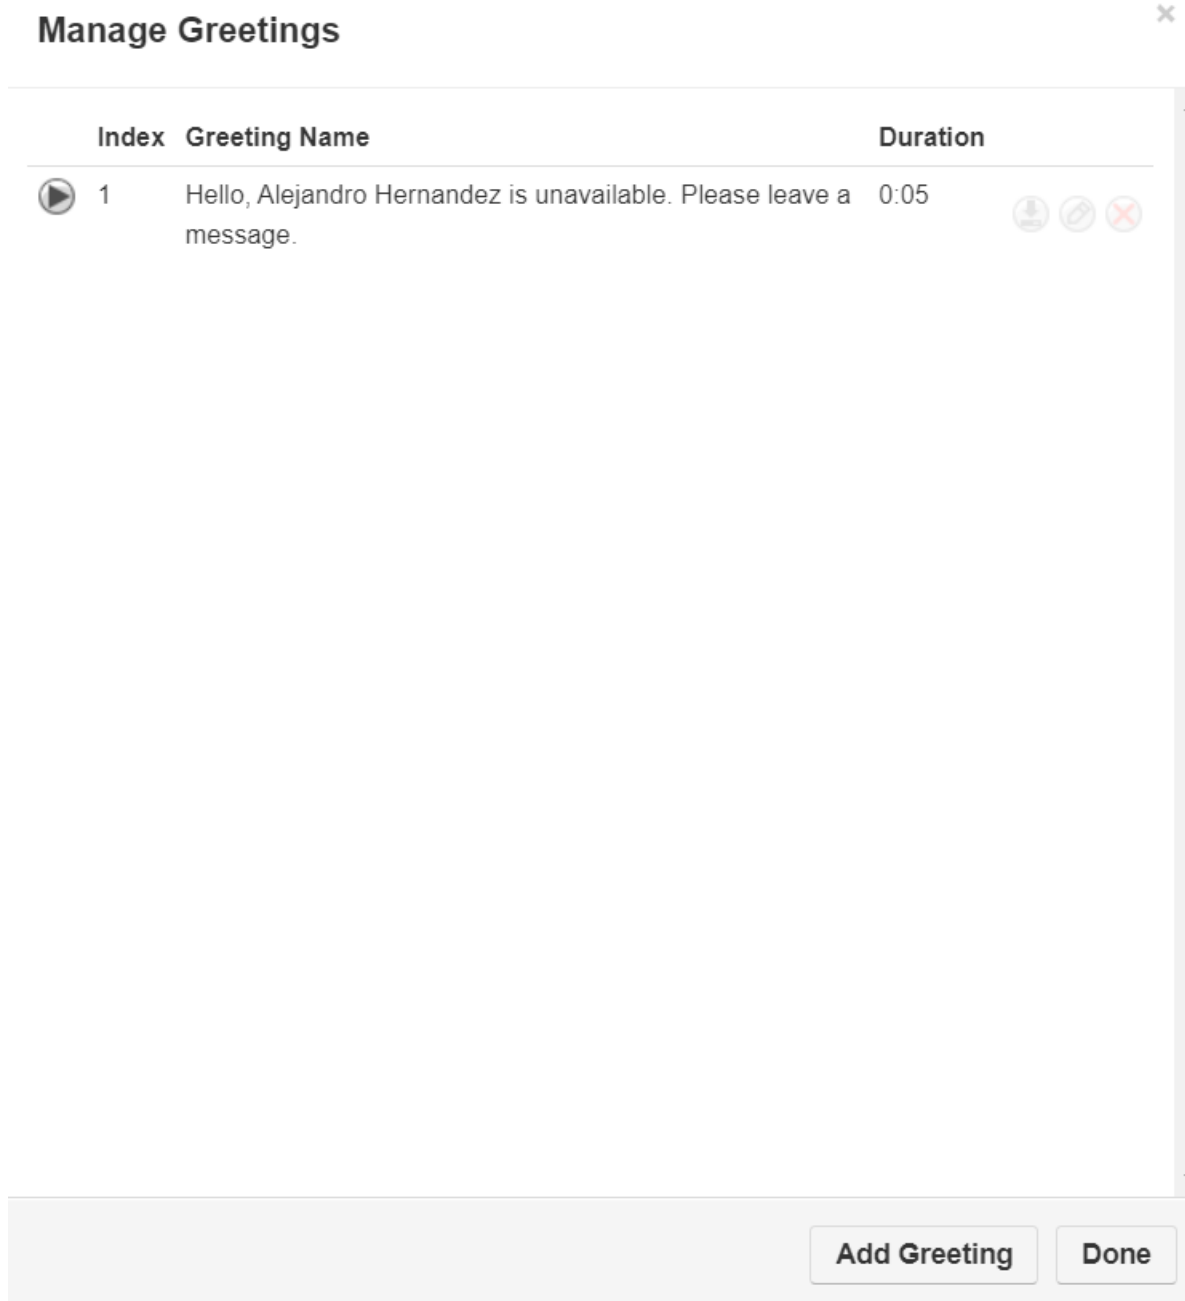



Figure 2-6. Manage Greetings Page

2. Click on the **Add Greeting** button.

*The appearance will change, showing a button with the **Record** option. When selected it will display a **Call me at** field.*





Manage Greetings

New Greeting Text-To-Speech  Upload Record

Greeting Name

Call me at field.  Call me at

Call

Index	Greeting Name	Duration	
 1	Hello, Alejandro Hernandez is unavailable. Please leave a message.	0:05	  

Add Greeting


Done

3. In the **Call me** at field, enter a number to call. This can be an extension or a telephone number such as your cell phone.
4. In the **Greeting name** field, enter a name for this greeting.
5. Click the **Call** button.
6. At the prompt, record the new greeting. When you finish the greeting, press **#**.

7. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.



Uploading a Greeting

➤ To upload a greeting

1. From the **Settings** tab on the greetings section, click the speaker icon .
Under Greetings page similar to the one in Figure 2-6 on page 22 appears.
2. Click **Upload**.
3. Click the **Browse** button.
4. In the Choose File to Upload dialog box, select a WAV or MP3 recording from your PC, and then click **Open**.
*The path and file name appear in the **Browse** field.*
5. Click **Upload**.
6. Click **Add Greeting** at the bottom of the Manage Greetings page, and then click **Done** to close the page.

Text to speech

➤ To Add a Speech via TTS

1. From the **Settings** tab on the greetings section, click the speaker icon .
A Manage Greetings page similar to the one in Figure 2-6 on page 22 appears.
2. Click **Text-To-Speech**.
3. A new field with the text will show up. Enter the text you want to be spoken via the AI voice.
4. In the voice field you can click the play button  to listen which voice fits best within your organization.
5. Once all has been set, click on the **Add greeting** button and then **Done**.

Greeting for Dial by Name Directory

If your company has a dial-by-name directory, you must record your name for the directory to be found. It should look similar to what is in the Manage Greetings on in **Figure 2-6**.

Answering Rules and Time Frames

Though Answering Rules and Time Frames are separate tabs, they are so interconnected that describing them together makes sense.

Time Frames

Time frames allow you to control the scheduling of the system. You configure time frames using the Time Frames page. To display this page, click the **Time Frames** icon at the top of the page:



Time
Frames

Three common time frames are:

- Open Hours (for example, M-F 9am-5pm)
- Holidays (Independence Day, Thanksgiving, New Year's, and so on)
- Closed Hours (all other times)

Time frames can be both shared (system-wide and set by the administrator) or personal to your extension. You can add a time frame to your extension by clicking the **Add Time Frame**.

Time Frames / RingLogix-HQ / *
↻

← Back

Add Time Frame

Name	Description	Owner
BusinessHours	Days and Times ⓘ	Shared ⓘ ⊗ ⊗
Holidays	Specific Dates ⓘ	Shared ⓘ ⊗ ⊗

➤ **To add time frames**

1. From the Time Frames page, click **Add Time Frame**.

The Add a Timeframe page appears.

Add a Timeframe x

Name Note: Name cannot be changed

When Always Days of the week and times Specific dates or ranges

2. In the **Name** field, enter a name for this time frame.
3. Next to **When**, select the time period when the time frame will be applied:
 - **Always** = select this option if the time frame will always be applied. Click **Save** to complete the procedure.
 - **Days of the week and times** = select this option to select days and times when the time frame will be applied. Proceed to “If you select Days of the week and times” on page 26.
 - **Specific dates or ranges** = select this option to specify a specific date or range of dates. Proceed to “If you select Specific dates or ranges” on page 30.

If you select Days of the week and times

Options appear for selecting days and times when the time frame will be applied (see Figure 2-7).

Figure 2-7. Setting Days of the Week and Times

1. Using the check boxes next to the name of each day of the week, check the days when the time frame will be applied. A blue line to the right of checked day shows the default hours for this time frame (9:00 AM through 5:00 PM).

Add a Timeframe

Name: **Note:** Name cannot be changed

When: Always Days of the week and times Specific dates or ranges

Sunday

Monday

Tuesday

Wednesday

Thursday

Friday

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

12:00 am 6:00 am 12:00 pm 6:00 pm 11:59 pm

Cancel Save

Default Operating hours

- To change the start time, drag the button on the left side of the blue bar either to the left to begin the start time earlier or to the right to begin the start time later.

Monday


12:00 AM 6:00 AM 9:00 AM 12:00 PM 6:00 PM 11:59 PM

- To change the end time, drag the button on the right side of the blue bar either to the left to shorten the end time or to the right to lengthen the end time.

Monday

12:00 AM 6:00 AM 12:00 PM 5:00 PM 6:00 PM 11:59 PM

Hint: To fine-tune start and end times, click start time or end time button, and then use the left and right arrow keys on your keyboard to change the time in 5-minute increments.

















4. By default, each day is made up of one time period. However, you can use the  icon to define two time periods per day. For example, the figure below shows a setup for an office that answers calls in the morning and afternoon, and then transfers calls to an answering service over lunch, on Monday through Friday. By doing this, you would create two time frames (for example, one from 8 to noon and another from 1:00 to 5:00 PM).

5. Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.

[Back](#)





















[Add Time Frame](#)

Name	Description	Owner	
Always	Always 	Shared 	 
Business Hours	Days and Times 	Shared 	 
Ext151TimeFrame	Always 	Shared 	 
Normal Business Hours	Days and Times 	Shared 	 

Hint: Hovering the mouse over the “i” right next to the Time frame Name and under the **Description** column, this will show the settings for that timeframe.

Time Frames / 282753 / * ↻

[Back](#) **Add Time Frame**

Name	Description	Owner
Always	Always ⓘ	Shared ⓘ  
Business Hours	Days and Times ⓘ	Shared ⓘ  
Ext151TimeFrame	Always ⓘ	Shared ⓘ  
Normal Business Hours	Days and Times ⓘ	Shared ⓘ  
test1	Days and Times ⓘ	Shared ⓘ  
TimeFrame100	Always ⓘ	Shared ⓘ  
TimeFrame101	Always ⓘ	Shared ⓘ  
TimeFrame102	Always ⓘ	Shared ⓘ  
TimeToggle	Always ⓘ	Shared ⓘ  
Weather	Specific Dates ⓘ	Shared ⓘ  

Day	Time
Monday	9:00 am to 5:00 pm
Tuesday	9:00 am to 5:00 pm
Wednesday	9:00 am to 5:00 pm
Thursday	9:00 am to 5:00 pm
Friday	9:00 am to 5:00 pm

If you select Specific dates or ranges

Fields appear for entering dates or ranges (see Figure 2-8).

Add a Timeframe ×

Name Note: Name cannot be changed

When Always Days of the week and times Specific dates or ranges

Specific dates or ranges to

Figure 2-8. Setting Dates or Ranges

1. Click in the left field, and then select a starting date and time from the pop-up calendar.
2. Click in the right field, and then select an ending date and time from the pop-up calendar.
3. To specify additional ranges, click the icon to display another row of fields, and then repeat steps 1 and 2 in the new fields. Repeat this step for each additional date or range you want to specify. To delete a date or range, click the icon next to the appropriate row.

Add a Timeframe ×

Name Note: Name cannot be changed

When Always Days of the week and times Specific dates or ranges

Specific dates or ranges to

June 2023

Su	Mo	Tu	We	Th	Fr	Sa
				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	

Time 12:00 am

Hour

Minute

Always Shared

Always Shared

Specific Date Shared

- Click **Save** to save your selections.

The time frame appears as a row on the Time Frames page.

Name	Description	Owner
Always	Always	Shared
Business Hours	Days and Times	Shared
Ext151TimeFrame	Always	Shared
Normal Business Hours	Days and Times	Shared
Normal Business Hours Dates	Specific Dates	Shared


Hint: Moving the pointer over the blue text in the **Description** column shows the settings for that timeframe.

Name	Description	Owner
Always	Always	Shared
Business Hours	Days and Times	Shared
Ext151TimeFrame	Always	Shared
Normal Business Hours	Days and Times	Shared
Normal Business Hours Dates	Specific Dates	Shared
test1	Days and Times	Shared

Begin	End
06/14/2023	06/29/2023

Answering Rules

After you set up your time frames, you can create different answering rules for your time frames. You configure answering rules using the Answering Rules page. To display this page, click the **Answering Rules** icon at the top of the page:



The left side of the Answering page has a **Rings for n seconds** drop-down list that allows you to specify the maximum ring time (one ring is generally 5 seconds). When that time expires, the caller will be forwarded to the **Call Forward When Unanswered** rule if defined; otherwise, the caller will be forwarded to voicemail if enabled. The right side of the Answering Rules page has buttons for adding answering rules, and specifying allowed and blocked numbers.

Figure 2-9 shows examples of answering rules. In this figure:

- The extension has a rule to simultaneously ring many desk phones during Open Hours.
- **Cell Forward** rings many desk phones and a cell phone simultaneously.
- Holiday and closed hour rules go straight to voicemail.

The active rule is the topmost rule that matches the conditions in the corresponding time frame. In Figure 2-9, for example, the time is around 1pm on Friday, so both **Open Hours** and **Cell Forward** rule match the time/day condition, but **Open Hours** is active because it is the topmost rule. You can change the order by using the arrows at left of each rule to drag the rules.

Answering Rules / Kevin Selkowitz (5702) ↻

Ring for seconds

Time Frame	Description
⬆ Open Hours Active	Simultaneously ring x5702, x5702a, x5702c, x5702b, x5702d, x5702e
⬆ Cell Forward	Simultaneously ring x5702, (425) 555-1212, x5702c, x5702e
⬆ Kevin Holiday	Do not disturb
⬆ Closed Hours	Do not disturb
⬆ Holidays	Do not disturb

Figure 2-9. Sample Answering Rules

➤ **To add an answering rule**

1. From the Answering Rules page, click **Add Rule**.

The *Add an Answering Rule* page appears. From this page, you can create rules to screen callers, forward calls, and ring multiple numbers simultaneously.

Add an Answering Rule ✕

Time Frame This is when your answering rule will apply

Enabled

Do not disturb

Call screening

Call Forwarding

Always

When busy

When unanswered

If Device Offline

Simultaneous ring

Include user's extension

Ring all user's phones

Answer confirmation for offnet numbers

Just ring user's extension

Figure 2-10. Add an Answering Rule Page

2. Complete the fields in the Add an Answering Rule page (see Table 2-3).
3. Click **Save**.

Table 2-3. Fields in the Add an Answering Rule Page

Field	Description
Time Frame	Select the time frame when this answering rule will apply.
Do not disturb	No phone rings, goes straight to voicemail if available.
Call screening	Prompts caller to say their name, lets you screen the call before accepting.
Call Forwarding Always	Immediately forwards to the number specified. See “Call Forward Drop-down Options” below.
Call Forwarding When Busy	Forwards calls to the number specified when your extension has used all available call paths. See “Call Forward Drop-down Options” below.
Call Forwarding When Unanswered	Forwards calls to the number specified if the call is not answered after the specified ring timeout. See “Call Forward Drop-down Options” below.
Call Forwarding When Offline	Automatically forwards if your desk phone loses communication (such as during a power outage). See “Call Forward Drop-down Options” below.
Simultaneous ring	Rings many phones at once. Check box options allow you to: <ul style="list-style-type: none"> • Include the user’s extension. • Ring all your user’s phones. • Use the option “Answer confirmation for offnet numbers” to ensure that a person — and not voicemail — answers simrings to a cell/landline by prompting the answering party to press 1 to accept the call. An icon to the right of this option allows you to specify a ring delay. <p>Note: A simring rings handsets, not users. So, for example, if 111 is listed, the simring will ring handset 111. If user 111 has a call forward set to their cell, however, the simring will not occur at the cell since simring rings handsets, not users.</p>
Just ring user’s extension	Rings just your phone.

Call Forward Drop-down Options

When entering an extension as a call forward option, a drop-down list allows you to forward the call to specific resources associated with that extension. Table 2-4 describes the options. Some options may not appear, depending on the features associated with the extension.

Table 2-4. Call Forward Drop-down Options on the Add an Answering Rule Page

Field	Description
Handset	Bypasses the user answering rules and forwards to the handset associated with the specified user.
User	Forwards to the user at that extension and follows the user’s answering rules.
Voicemail	Forwards to voicemail at the specified extension.
Queue	Forwards to the queue associated with that user.
Autoattendant	Forwards to the auto attendant associated with that user.
Conference	Forwards to a Conference bridge

Ring Timeout

At the top of the page is the ring timeout selection. This option specifies the number of seconds that your phones will ring or forwarding rule before going to voicemail (when available).

Allowing or Blocking Callers


The Answering Rules page has an **Allow/Block** button that allows you to permit or block calls from certain numbers. Using this feature, you can block unwanted calls to your phone, as well as calls from anonymous and unwanted numbers. Allowed numbers bypass user Do Not Disturb and Call Screening rules to ring through immediately.

1. From the Answering Rules page, click **Allow/Block**.


The Allow/Block page appears. This page has two lists, one for allowed phone numbers (on the left) and another for blocked phone numbers (on the right).

The screenshot shows a web interface titled "Allow / Block" with a close button (x) in the top right corner. The interface is divided into two main sections: "ALLOWED NUMBERS" on the left and "BLOCKED NUMBERS" on the right. Each section contains an input field with the placeholder text "Enter a number" and a "+" button to its right. Below the input fields are scrollable lists. At the bottom of the "BLOCKED NUMBERS" list, there is a checkbox labeled "Block anonymous or unknown". At the bottom of the page, there are two buttons: "Import" and "Done".

Figure 2-11. Allow/Block Page



2. To allow phone numbers, perform the following steps under **ALLOWED NUMBERS**:
 - a. Click in the **Enter a number** field.
 - b. Enter the number you want to allow.
 - c. Click the  button. The number appears in the **ALLOWED NUMBERS** list and a brief message tells you the allowed number was added.

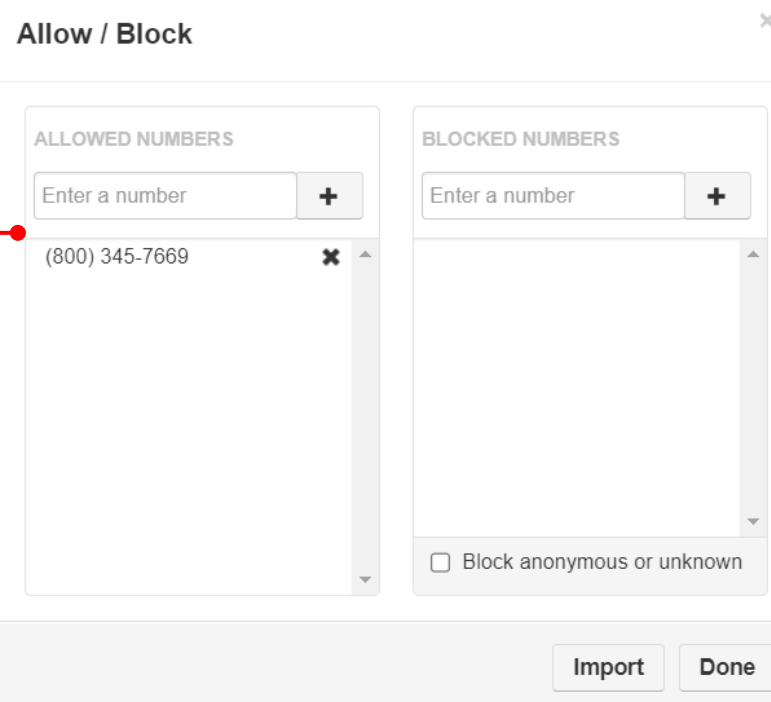- d. To add more numbers, repeat step 2.
- e. To remove a number, click the  button next to that number.



The screenshot shows a modal window titled "Allow / Block" with a close button (x) in the top right corner. It is divided into two main sections: "ALLOWED NUMBERS" on the left and "BLOCKED NUMBERS" on the right. Each section has an input field labeled "Enter a number" with a "+" button to its right. Below the "ALLOWED NUMBERS" input, there is a list containing the number "(800) 345-7669" with a small "x" button next to it. Below the "BLOCKED NUMBERS" input, there is a checkbox labeled "Block anonymous or unknown". At the bottom of the modal, there are two buttons: "Import" and "Done". A red line points from the text "Examples of allowed numbers" to the list in the "ALLOWED NUMBERS" section.

Figure 2-12. Example of Allowed Numbers

3. To block phone numbers, perform the following steps under **BLOCKED NUMBERS**:
 - a. Click in the **Enter a number** field.
 - b. Enter the number you want to block.
 - c. Click the  button. The number appears in the **BLOCKED NUMBERS** list and a brief message tells you the blocked number was added.
 - d. To add more numbers, repeat step 3.
 - e. To remove a number, click the  button next to that number.
4. To block anonymous calls and calls from unknown numbers, check **Block anonymous or unknown**.

Allow / Block ×

ALLOWED NUMBERS

+

BLOCKED NUMBERS

+

(800) 345-7669 ✖

Block anonymous or unknown

Import Done

Examples of blocked numbers

Figure 2-13. Example of Blocked Numbers

- When you are finished, click **Done**.

The Import button is a feature that allows you to download a template to fill multiple numbers to be either allowed or block to avoid manually adding the add/block numbers one by one.

Import From File ×

Browse

Cancel Download Template Upload

Contacts

By default, contacts contain all the extensions on your system. However, you can add contacts to enable easier access to everyone you need to reach.

You configure contacts using the Contacts page. To display this page, click the **Contacts** icon at the top of the page:



Contacts

The following figure shows an example of a Contacts page. The sections following the figure describe the key areas on the page.

Name	Number(s)	Status	Department	Site
22 [Redacted]	2301		Engineering	Miami
22 [Redacted]	2302		Engineering	Miami
JA Javier Aguirre	275		Engineering	
AA Abdullah Ahmed	253			
HA Hussain Alkalaf	222		Sales	
JA Jessa Ambulo	238		Software	
CA Christina Armesto	221		LNP	Tampa
OB Oliver Bohol	226		Sales	
EB Erick Bruce	215		Tech Support	Miami
MA [Redacted]	227		LNP	

Filter and Search

The **All** pull-down list allows you to search contacts by group. Using this list, you can select groups to search such as Favorites, Departments, Available, Busy, and more. Selecting a group filters the contacts on the page to show only the ones located in the group selected.

The **Enter a name or extension** field below the drop-down list allows you to search by contact name or extension. Entering a name or extension in this field filters the contacts on the page to show only the ones that match your entry. Delete the search of the search box to see all of the contacts once more.

Add and Import Contacts

The **Add Contact** button allows you to add a contact one at a time. These are for external contacts only. Your contact list will automatically update with your internal extensions.

Import will allow you to select a file from your PC, the import can accept CSVs from Microsoft Outlook and Gmail as well as vCards.

Adding a Contact

➤ **To add a contact**

1. From the Contacts page, click **Add Contact**.

The Add Contact page appears.

Add Contact ✕

First Name	<input type="text"/>
Last Name	<input type="text"/>
Work number	<input type="text"/>
Mobile number	<input type="text"/>
Home number	<input type="text"/>
Fax number	<input type="text"/>
Email	<input type="text"/>

2. Complete the fields in the Add Contact page (see Table 2-5).

3. Click **Save**.

The contact appears on the Contacts page.

Table 2-5. Fields in the Add Contact Page


Field	Description
First Name	Contact's first name.
Last Name	Contact's last name (surname).
Work number	Contact's work telephone number.
Mobile number	Contact's mobile telephone number.
Home number	Contact's home telephone number.
Email	Contact's email address.

Importing Contacts

➤ To import contacts

1. From the Contacts page, click **Import**.

The Import Contacts pop-up window appears.

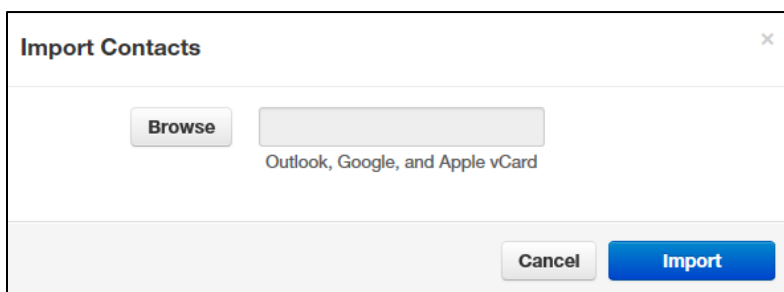

2. Click the **Browse** button.
3. In the Choose File to Upload dialog box, go to the location where the file you want to import is located. Click the file, and then click **Open**.

*The path and file appear in the **Browse** field.*

4. Click **Import**.

The imported contacts appear on the Contacts page.

Selecting Favorites

When hovering over a contact, a light gray star appears next to the contact name. Clicking the star selects the contact as a favorite and changes the color of the star to yellow.

Editing Contacts

When hovering over a contact you'll see an edit button on the far right, click that button to edit the contact.

Phones

The Phones page allows you to manage your phones. To display the Phones page, click the **Phones** icon at the top of the page:



Phones






















Each row shows a phone that has been added to the system, along with:

- Whether the phone is registered.
- The phone name and device type. The hyperlink below the **Name** column allows you to edit the phone information. You can also edit or delete phones using icons on the right side of the row.
- The phone's IP address, MAC address, and line number on the phone associated with your extension.

Clicking the Refresh button  updates the information shown on the page.

The page has an **Add Phone** button that adds phones to your system. This task usually is performed by administrators and is not described in this guide.

The Phones page also has a **SNAPmobile** button that allows you to access SNAPmobile. SNAPmobile is a mobile app that turns your cell phone into an extension of your LineaVOX UCaaS. Make and receive calls with the same identify as being in the office along with managing your voicemail, answering rules, and contacts. To start using SNAPmobile, see “Using SNAPmobile” on page 42.

Phones / Alejandro Hernandez (219)					SNAPmobile	Add Phone
Name	Device Type	IP Address	MAC Address	Line		
 219wp	SNAP.GO Webphone 43.1.0 (Chrome 114.0.0.0)	179.5.118.83:61713	-	-		
 219q	MicroSIP/3.21.3	179.5.118.83:54816	-	-		
 219p	Z 5.5.15 v2.10.19.4	179.5.118.83:56491	-	-		
 219m	SNAPmobile 3.5.0.20 Samsung SM-N986U1/	179.5.118.83:53133	-	-		
 219t	SNAPmobile 3.3.4 iPad	178.249.214.54:64362	-	-		
 219	-	-	-	-		
 219r	-	-	-	-		

Using SNAPmobile

➤ To use SNAPmobile

1. From the Phones page, click **SNAPmobile**.

The splash screen in Figure 2-14 appears.

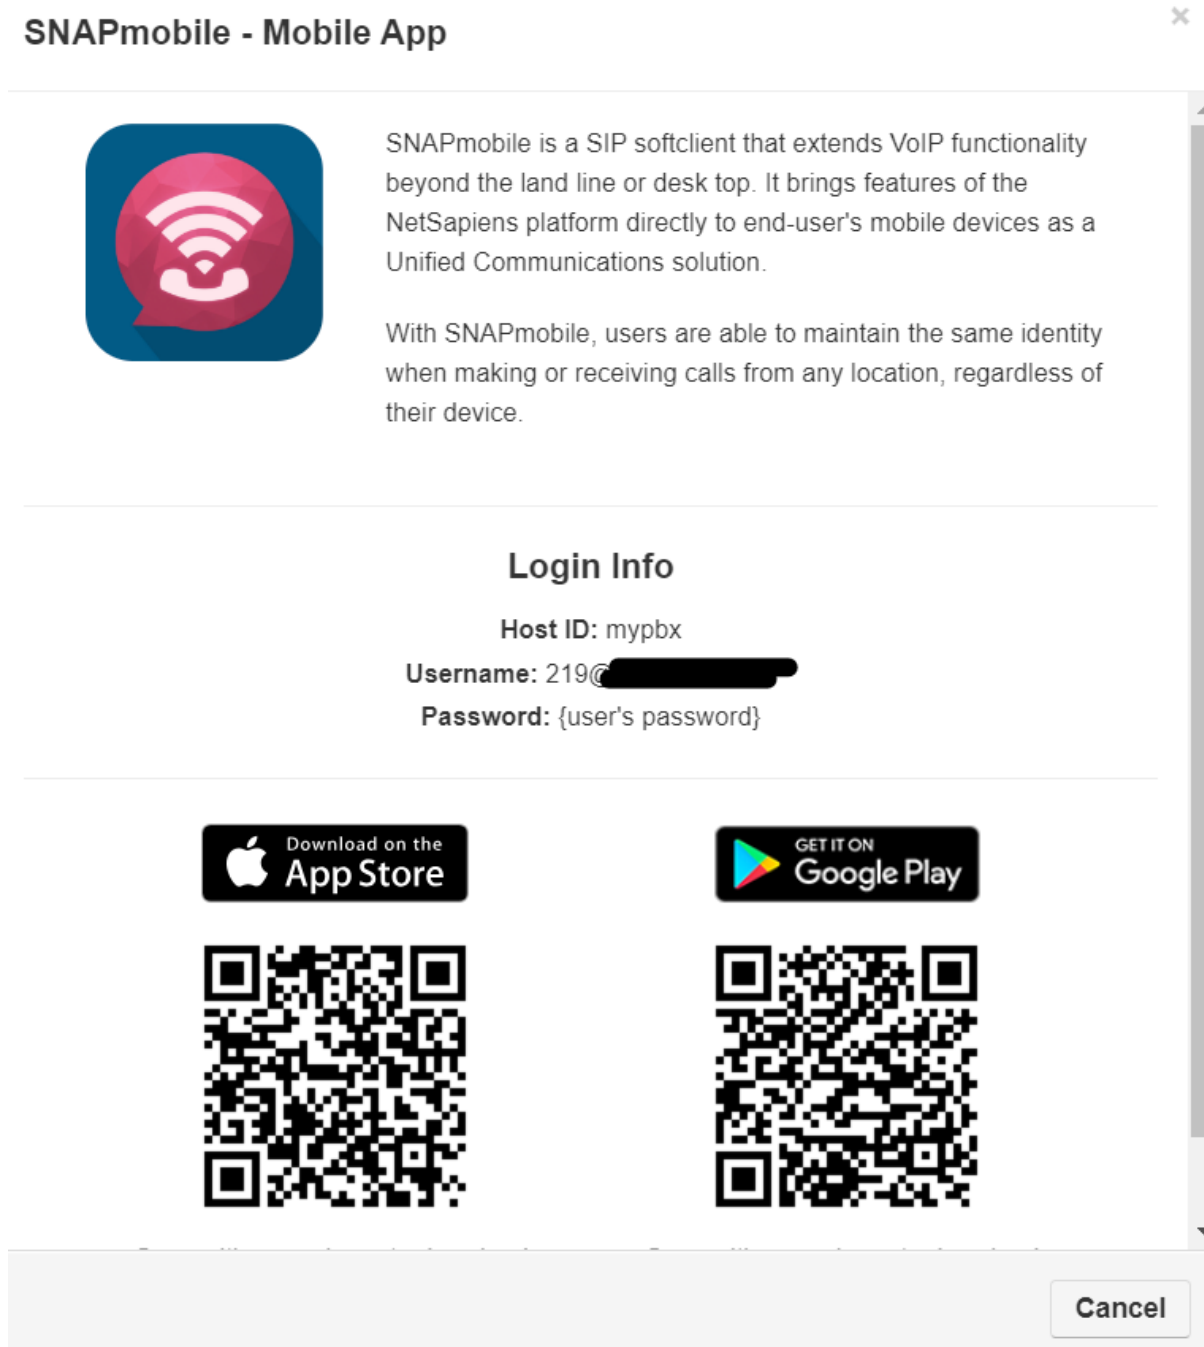


Figure 2-14. SNAPmobile Splash Screen

2. Scan the QR code to download the app or search for SNAPmobile in the app store, and then enter the information from that page into the SNAPmobile logon screen.

Music On Hold

Music on Hold allows you to specify personal music on hold for your extension. You configure music on hold files using the Music On Hold page. To display this page, click the **Music on Hold** icon at the top of the page:



Music on Hold

The purpose behind custom MoH (music on hold) is that messages can be stitched into the currently playing audio. e.g. While a customer is on hold, the music can now be briefly interrupted with a message, such as: "Your call is important to us. Please wait on the line and an agent will be with you shortly." This is often called a "comfort message" - a message or recording that reassures the caller to not hang up. The message can be used for advertising, for updating wait time, and more, and is configurable (time between messages, copying messages, etc.).

Music On Hold

User MoH Layout

Music

"randomize music" and "add music" are the available options here after music has been added

No music on hold files have been added for the organization.

Add music to play while callers are on hold.

[Add Music](#)

Messages

time between messages 30 [Add Message](#)

Messages	Duration	Filesize	download
1 testing	0:01	8.63 KB	download
2 testing (Copy)	0:01	8.63 KB	download

[shift order](#) [copy](#)

User MoH Layout - Music/Messages Panels for the User

Above is an example MoH page from the perspective of a Basic User scope. Basic Users and Call Center Agents access this page directly from the **Music on Hold** page. These user scopes do not have access to the MoH inventory table or the Domain User, and this is the only screen they see.

Office Managers and above can access the **User MoH Layout** by navigating to their user name dropdown > **My Account** and then clicking on the **Music on Hold** page.

The ability to "**copy and modify**" music and messages from the site is only available when there are no music/messages already in the table.



Call History


The Call History page shows a log of all your extensions calls. It also provides tools to filter and export data.

The left side uses color-coded icons to represent call status:

- Green = outbound calls
- Blue = inbound received calls
- Red = missed calls

Moving your screen pointer over an icon displays a tooltip with the call status. For example:

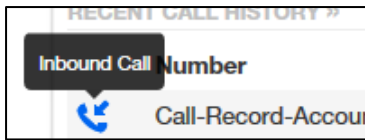


































You can click a number in the **Number** column dial back the number. Clicking the Refresh button  updates the information shown on the page.

To display the Call History page, click the **Call History** icon at the top of the page:



Call History

The following figure shows an example of the Call History page. The sections following the figure describe the **Filters** and **Export** buttons.

Call History						
Filters 06/17/2023 12:00 am — 06/20/2023 11:59 pm						Export
Number	Name	Date	Duration	Reason		
 243	Stephanie Sanabria	Today, 2:44 pm	0:00		  	
 239	Marlon Sibrian	Today, 2:29 pm	0:03		  	
 239	Marlon Sibrian	Today, 2:28 pm	0:04		  	
 233	Ed Hernandez	Today, 2:19 pm	1:24		  	
 233	Ed Hernandez	Today, 2:18 pm	0:25		  	
 233	Ed Hernandez	Today, 2:17 pm	0:03		  	
 233	Ed Hernandez	Today, 2:16 pm	0:12		  	
 216	Luis Espinoza	Yesterday, 5:48 pm	0:04		  	

Filtering the Call History


The **Filters** button allows you to filter the information displayed in the Call History page, so you can view only the information that interests you.


➤ **To filter the call history**

1. From the Call History page, click **Filters**.

The Call History Filters page appears.


Call History Filters ✕

From 

To 

Caller Number

Dialed Number

Call Type 

[Clear Filters](#)

2. Complete the fields in the Add Contact page (see Table 2-6).


3. Click **Set Filters**.


The Call History page appears, with only the items that match your criteria.

Table 2-6. Fields in the Call History Filters Page

Field	Description
Date Range	To filter by a specified date range, click in the left field, and then select a starting date and time from the pop-up calendar (see Figure 2-15). Click in the right field, and then select an ending date and time from the pop-up calendar.
Caller Number	To filter by a caller number, enter the caller's number.
Dialed Number	To filter by a dialed number, enter the dialed number.
Call Type	To filter by type of call, select a call type.

Call History Filters ×

From 

To 

Caller Number

Dialed Number

Call Type

June 2023

Su	Mo	Tu	We	Th	Fr	Sa
				1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	

Time


Hour

Figure 2-15. Selecting a Start Date from the Pop-up Calendar

Exporting the Call History Log

➤ To export the call history log

1. From the Call History page, click **Export**.

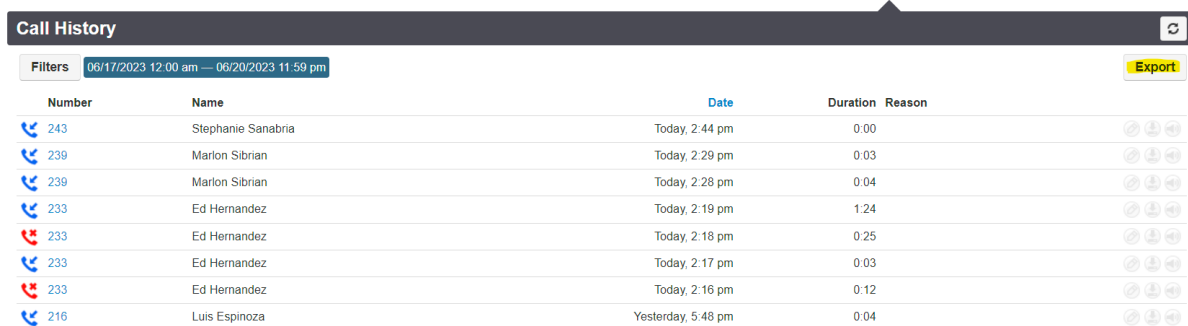

The screenshot shows the 'Call History' interface. At the top, there is a header 'Call History' with a refresh icon. Below it, a filter bar shows the date range '08/17/2023 12:00 am -- 08/20/2023 11:59 pm' and an 'Export' button. The main content is a table with the following columns: Number, Name, Date, Duration, and Reason. Each row represents a call record with a small icon to the left of the number and three icons to the right of the duration.

Number	Name	Date	Duration	Reason
243	Stephanie Sanabria	Today, 2:44 pm	0:00	
239	Marlon Sibrian	Today, 2:29 pm	0:03	
239	Marlon Sibrian	Today, 2:28 pm	0:04	
233	Ed Hernandez	Today, 2:19 pm	1:24	
233	Ed Hernandez	Today, 2:18 pm	0:25	
233	Ed Hernandez	Today, 2:17 pm	0:03	
233	Ed Hernandez	Today, 2:16 pm	0:12	
216	Luis Espinoza	Yesterday, 5:48 pm	0:04	

Depending on your browser, the history log is downloaded to your computer or you are prompted to save the log. The log is in comma-separated-value (CSV) format.

2. After downloading the log, you can open it using Microsoft Excel, Google Docs, and other spreadsheet applications.

Profile

To access your profile, click on the top right corner on your name and a dropdown will show with the 'Profile' button as shown below. From this page, you can configure the settings in Table 2-7.

Number	Name	Date	Duration	Reason
243	Stephanie Sanabria	Today, 2:44 pm	0:00	
239	Marion Sibrian	Today, 2:29 pm	0:03	
239	Marion Sibrian	Today, 2:28 pm	0:04	
233	Ed Hernandez	Today, 2:19 pm	1:24	
233	Ed Hernandez	Today, 2:18 pm	0:25	
233	Ed Hernandez	Today, 2:17 pm	0:03	
233	Ed Hernandez	Today, 2:16 pm	0:12	
216	Luis Espinoza	Yesterday, 5:48 pm	0:04	

Profile

First Name

Last Name

Timezone

User's Scope

Directory Options Announce in Audio Directory
 List in Directory

Caller ID Information

Area Code

Caller ID Name

Caller ID

Emergency Caller ID

Change Account Security

Email Address(es)

New Password

Confirm New Password

Minimum length of 8 characters, minimum of 1 capital letter(s), minimum of 1 number(s).

Current Password


Your current password is required to update your email address or security information.

Change Voicemail PIN

New PIN

Minimum length of 4 characters.

Table 2-7. Fields in the Profile Page

Field	Description
First Name	The first name and last name will be shown in contacts and used in the dial by name directory.
Last Name	
Timezone	Your local time zone.
Email Address(es)	Address used for email, password resets, etc. To add email addresses, click the  button to add fields for entering more email addresses.
Record User's Calls	Select whether the calls for this user will be recorded (Yes) or not recorded (No).
Directory Options	Enables or disables announce in auto directory and list in directory features. <ul style="list-style-type: none"> Announce in Audio directory = check to include the user in the dial-by-name directory. List in Directory = check to add user to the internal extensions list (contacts).
Caller ID Information	
Area Code	Local area code for 7 digit dialing associated with the user.
Caller ID	For outbound calls, this is the number that recipients will see.
911 Caller ID	For calls to 911, this is the e911-enabled number the 911 agent will see.
Change Password	
New Password	Password for voicemail and the portal. Avoid using common codes like 0000 or 1234. For security, each typed password character is masked by a dot (●). Please keep this number secure. We will never call you to request your passcode.
Confirm New Password	

INDEX

- 3**
- 3-way conference, 11
- A**
- Accessing
 - portal, 14
 - voicemail, 7
 - voicemail remotely, 8
- Active calls, 15
- anss, 33
- Alternate greetings, 8
- Answering rules, 30
- Attended transfers, 10
- B**
- Blind transfers, 10
- Blocking callers, 33
- C**
- Call forward, 32
- Call handling, 10
- Call history, 44
- Callers, allowing or blocking, 33
- Calls
 - active, 15
 - incoming, 14
 - making, 6
 - receiving, 7
- Contacts, 36
- D**
- Dialing
 - extension, 6
 - off-hook, 6
 - on-hook, 6
- Directed call pickup, 11
- E**
- Extension dialing, 6
- External number transfers, 11
- G**
- Greeting
 - recording, 19
 - uploading, 21
- H**
- Handling calls, 10
- Home page, 16
- I**
- Incoming calls, 14
- Intercom, 6
- International calls, 6
- M**
- Mailbox setup, 8
- Making international calls, 6
- Messages page, 17
- Music on hold, 43
- O**
- Off-hook dialing, 6
- On-hook dialing, 6

P

Park and hold, 11
Phones page, 40
Portal, 14
 call history, 45
 contacts, 36
 home page, 16
 Messages page, 17
 music on hold, 41
 profile, 49
Profile, 49

R

Receiving calls, 7
Recording a greeting, 19
Remote voicemail, 8
Ring timeout, 33

S

Setting up your mailbox, 8

SNAPmobile, 41

T

Time frames, 23
Transfers
 attended, 10
 blind, 10
 external numbers, 11
 voicemail, 11

U

Uploading a greeting, 21

V

Voicemail, 17
 accessed, 7
 accessed remotely, 8
 settings, 18
 transfer, 11
 tree, 8

LineaVOX has made a good faith effort to ensure the accuracy of the information in this document and disclaims the implied warranties of merchantability and fitness for a particular purpose and makes no express warranties, except as may be stated in its written agreement with and for its customers.

LineaVOX shall not be held liable to anyone for any indirect, special or consequential damages due to omissions or errors. The information and specifications in this document are subject to change without notice.

Copyright © 2024. All Rights Reserved.

All trademarks and registered trademarks are the property of their respective owners.

LineaVOX UcaaS and PBX User Guide

June 21, 20232018

Document version: Version 1